



ULTRA LOW VF SCHOTTKY RECTIFIER


Voltage 45 V Current 2 A


Features

- Ultra low forward voltage drop, low power loss
- High efficiency operation
- Lead free in compliance with EU RoHS 2011/65/EU directive

Mechanical Data

- Case: Molded plastic, DO-41
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.012 ounces, 0.336 grams
- Marking: Part number



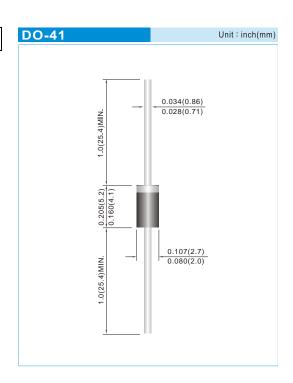

Maximum Ratings (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT		
Maximum repetitive peak reverse voltage		VRRM	45	V	
Maximum rms voltage		VRMS	32	V	
Maximum dc blocking voltage		VR	45	V	
Maximum average forward rectified current		I F(AV)	2	Α	
Peak forward surge current: 8.3ms single half sine- wave superimposed on rated load		IFSM	50	А	
Timinal the annual manietanes	(Note 1)	$R_{\theta JA}$	80	°C/W	
Typical thermal resistance	(Note 2)	$R_{ heta JC}$	40		
Operating junction temperature range		Тл	-55 to +150	°C	
Storage temperature range		Тѕтс	-55 to +150	°C	

- Note:1.The testing condition of the thermal resistance (junction to ambient) is based on 10 mm lead length between mini copper pads
 - 2. The testing condition of the thermal resistance (junction to Case) is based on 10 mm lead length between two 10cm x 10cm copper pads





Electrical Characteristics (T_A=25 °C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNITS
Breakdown voltage	V_{BR}	I _R =0.5mA	T _J =25°C	45	-	-	V
Instantaneous forward voltage	V_{F}	I _F =0.5A	TJ=25°C	-	0.33	-	V
		I _F =2A		-	0.43	0.47	
		I _F =0.5A	TJ=125°C	-	0.25	-	V
		I _F =2A		-	0.4	-	
Reverse current	I _R	V _R =36V	T _J =25°C	-	12	-	μА
		V _R =45V	T _J =25°C	-	-	40	μА
			T _J =125°C	-	2	-	mA

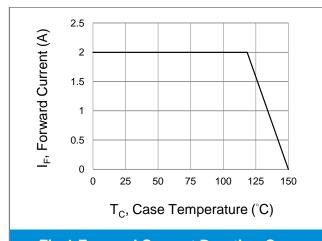


Fig.1 Forward Current Derating Curve

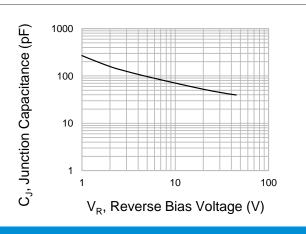


Fig.2 Typical Junction Capacitance

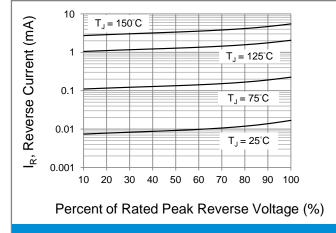


Fig.3 Typical Reverse Characteristics

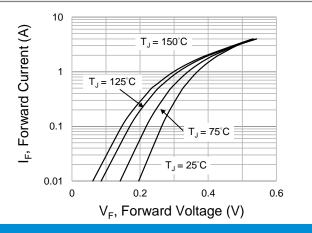


Fig.4 Typical Forward Characteristics





Part No_packing code_Version

SBM245L_AY_00001

SBM245L_AY_10001

SBM245L_B0_00001

SBM245L_B0_10001

SBM245L_R2_00001

SBM245L_R2_10001

For example:



Packing Code XX			Version Code XXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	Т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are
 responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no
 representation or warranty that such applications will be suitable for the specified use without further testing or
 modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.